




TC1000-H

SOLID ROOF/WALL HOME VENTILATOR

DUCTLESS



Cools up to 1,300 Sq ft

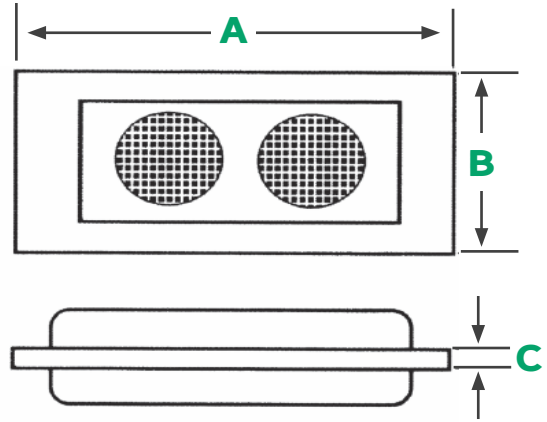

A - 36" B - 16 5/8" C - 1/4"

FEATURES

- Two energy efficient fans circulate 800 CFM*
- Built for solid roof or wall applications, making it perfect for A-frame construction and homes without attics
- Motorized R8 insulated damper opens while actively ventilating and seals closed when fan is not in use
- Simple standard 14-3 or 12-3 romex wiring
- Standard Model Includes Wall Mount Switch
- Maintenance-free
- Standard 3-year limited Warranty
Optional extended warranty



SPECS

AIR FLOW (CFM): **800**

ELECTRICAL REQUIREMENTS: **115/120 VAC, 60 HZ, 2.0 AMPS**

POWER USAGE (WATTS): **240 WATTS**

CLOSED DOOR INSULATION VALUE: **R8**


ROUGH OPENING: **12 3/4" x 27 3/4" +/- 1/2"**

AVAILABLE COLORS: **WHITE or BROWN**

OPERATION: **SINGLE SPEED 30 SECOND DAMPER DELAY BEFORE FAN STARTS**

WEIGHT: **UNIT 19 lbs SHIPPING 28 lbs**

OPTIONAL ACCESSORIES: **LINE VOLTAGE MECHANICAL THERMOSTAT, INTERIOR GRILLE**

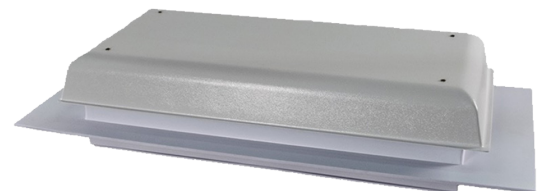

*CFM rates were measured in a controlled test environment. Results will vary due to building construction.