

DUCTLESS

TC1000-T

SUN ROOM VENTILATION FAN




Cools sun spaces up to 1,300 Sq Ft

The **TC1000-T** fits into the roof glazing system of most manufacturers' sun spaces, efficiently reducing temperature and solar gain.

FEATURES

- Two energy efficient fans circulate 800 CFM*
- Motorized R8 insulated damper opens while actively ventilating and seals closed when fan is not in use
- Simple standard 14-3 or 12-3 romex wiring
- Standard Model Includes Wall Mount Thermostat
- Maintenance-free
- Standard 3-year limited Warranty Optional extended warranty

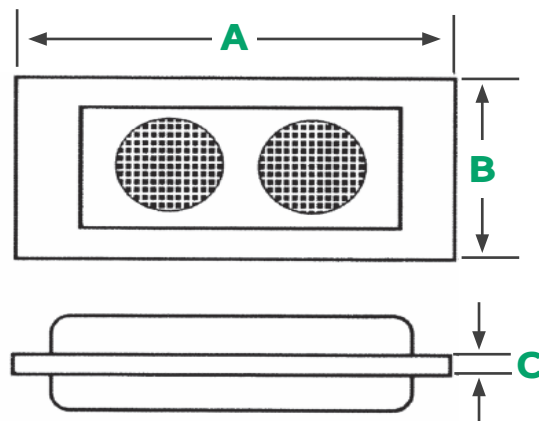

A		B		C
36"	x	16 5/8"	x	1/4"
29 5/8"	x	19"	x	1"
37"	x	19"	x	1"
30"	x	15 1/8"	x	7/8"
36"	x	15 1/8"	x	7/8"
37 3/8"	x	18 1/4"	x	7/8"
30"	x	15 1/2"	x	7/8"

SPECS

AIR FLOW (CFM): **800**

ELECTRICAL REQUIREMENTS: **115/120 VAC, 60 HZ, 2.0 AMPS**

POWER USAGE (WATTS): **240 WATTS**

CLOSED DOOR INSULATION VALUE: **R8**

ROUGH OPENING: **12 3/4" x 27 3/4"**


FULLY ASSEMBLED DAMPER UNIT: **L 33 1/4" x W 26 1/4" x H 19 1/4"**

AVAILABLE COLORS: **WHITE OR BROWN**

OPERATION: **SINGLE SPEED 30 SECOND DAMPER DELAY BEFORE FAN STARTS**

WEIGHT: **UNIT 28 LBS SHIPPING 35 LBS**

OPTIONAL ACCESSORIES: **DEHUMIDISTAT** (RECOMMENDED FOR USE IN POOL OR SPA AREAS THAT USE CHLORINE FREE CHEMICALS)

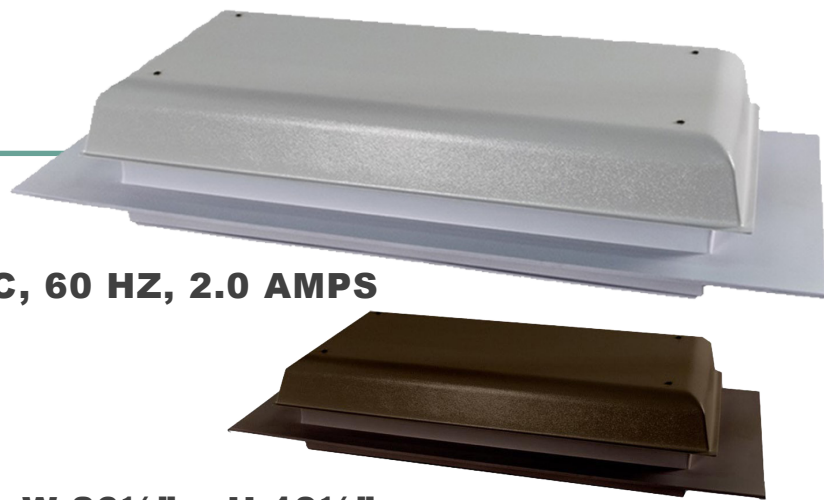

*CFM rates were measured in a controlled test environment. Results will vary due to building construction.