

HV1600 R38

WHOLE HOUSE FAN

TAMARACK
Ventilation
774-678-4433

FEATURES

Quickly exhausts 1530 CFM* | Cools & ventilates the entire home using fresh outside air

Energy efficient at only 233 W

Mechanical self-sealing doors with R38 insulation
Also available with R50 insulation


Install horizontally in the framing of the attic floor

Fits 16" or 24" on-center joists | No joist-cutting required

Maintenance-free

Controlled by remote, SPST wall switch, or spring-wound non-digital timer (Hardwired configuration is optional. Switch and timer not included with fan purchase)**
Not compatible with other types of timers

3-year limited warranty

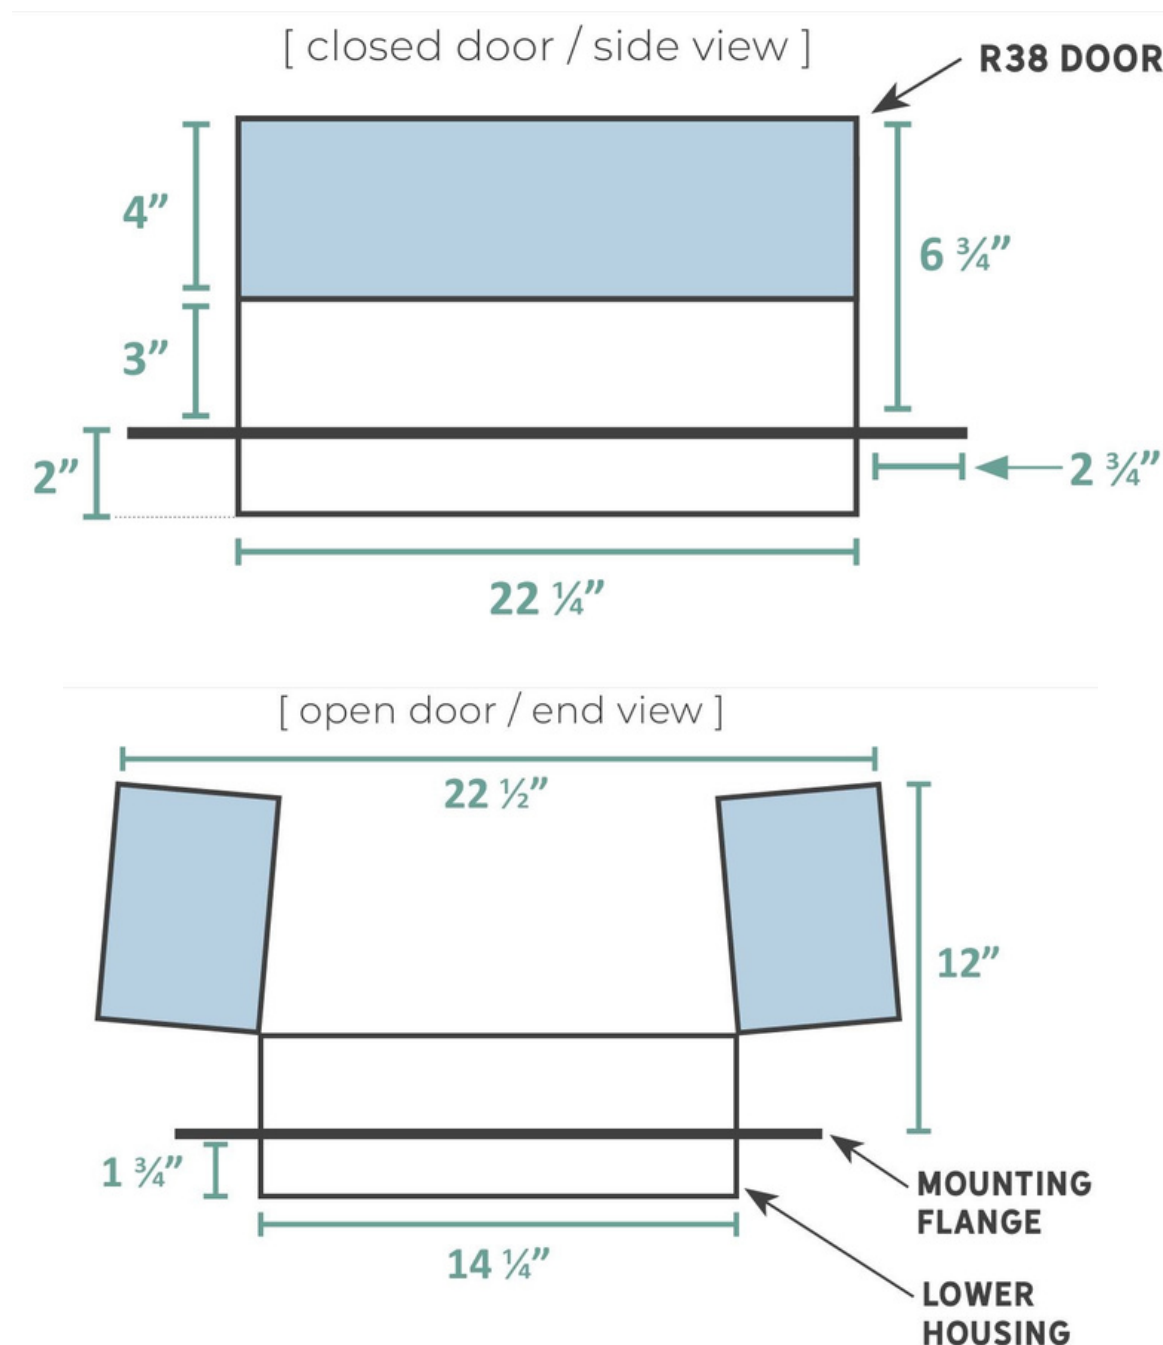

SPECS

Airflow (CFM): high speed **1530** low **1150**

Electrical requirements: **115/120 VAC, 60 Hz**

Power usage (Watts): **233 W**

Doors insulation value: **R38**

Rough opening: **14 1/2" x 22 1/2"**

White metal ceiling grille: **17 3/4" x 25 3/4"**

Operation: **2 speeds / 30 second delay as the doors open before the fans start**

Attic net free ventilation area needed for optimal performance: **2.5 square feet**

Weight: unit **26 lbs** shipping **38 lbs**

Purchase includes: **(1) HV1600, (1) Ceiling grille, (2) Remote controls**

Optional accessory: **HV Muffler/Insulation Barrier**



*CFM rates were measured in a controlled test environment.

Results will vary due to building construction

**All other controls will void the product warranty



Third party HVI-916 testing data available upon request